






1 2 3 4 5 6 7 8 9

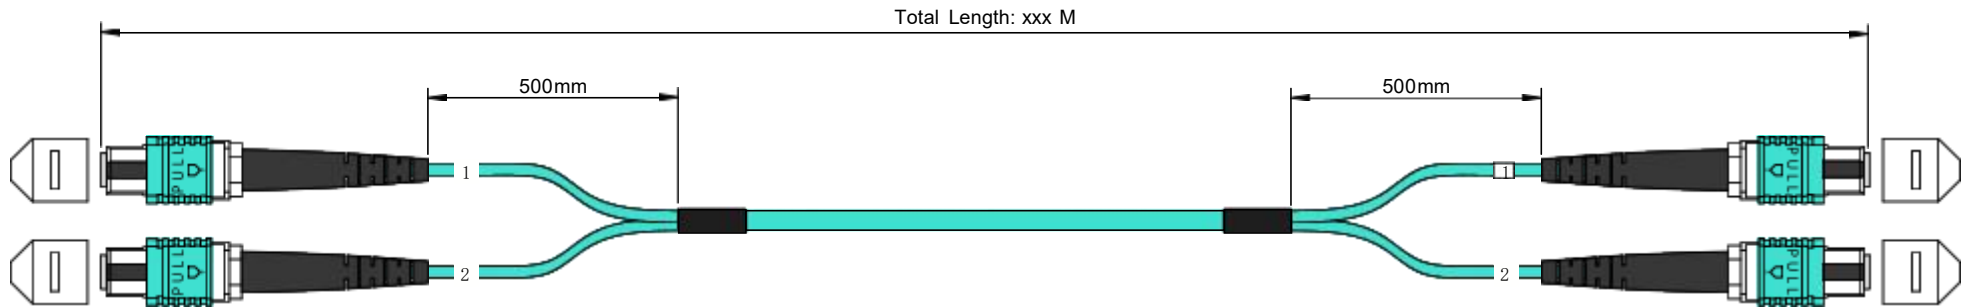

光缆示意图
Optical cable Diagram

A端/Side A

B端/Side B

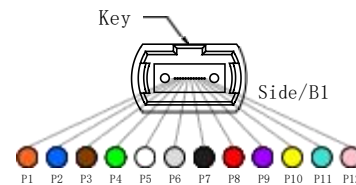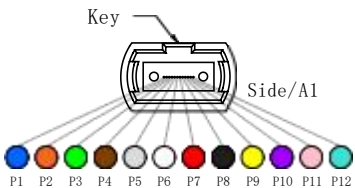

2*12CMPO-2*12CMPO Type:C Fiber Connectivity												
Side/A1 MPO	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
Side/B1 MPO	P2	P1	P4	P3	P6	P5	P8	P7	P10	P9	P12	P11
Side/A2 MPO	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
Side/B2 MPO	P2	P1	P4	P3	P6	P5	P8	P7	P10	P9	P12	P11

×2

×2

光缆参数 Cable Parameters

光纤芯数 Fiber Core	24C	
光纤规格 Fiber Type	MM/OM4-50/125um	
工作温度 Operating Temperature	-40~70℃	
衰减 Attenuation	≤2.3dB/km@850nm	
外护套 Outer Jacket	外径 Dimension	9.0mm
	材料 Material	LSZH
	颜色 Color	枚红/Rose Red
拉力 Tension	短期 Short term	500N
	长期 Long term	180N

连接器参数 Connector Parameters

连接器型号/Connector Type	MPO/UPC/F/OM4/12C
标损 Standard Loss	≤0.75dB
低损 Elite Loss	≤0.35dB
基准波段 Tesr Wavelength	@850nm
可重复性 Repeatability	≤0.2dB
互换性 Interchangeability	≤0.2dB
插拔次数 Durability	800~1000
工作温度 Operating Temperature	-40~75℃

1 2 3 4 5 6 7 8 9