
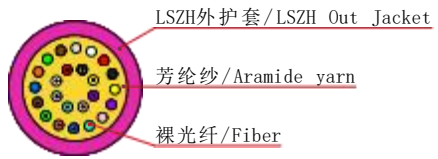



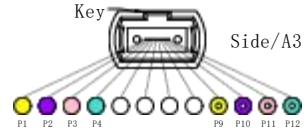




A端/Side A

光缆示意图/Optical cable Diagram

B端/Side B



3*8C-3*8C Type:C Fiber Connectivity												
Side/A1 MPO-8	P1	P2	P3	P4	—	—	—	—	P9	P10	P11	P12
Side/B1 MPO-8	P2	P1	P4	P3	—	—	—	—	P10	P9	P12	P11
Side/A2 MPO-8	P1	P2	P3	P4	—	—	—	—	P9	P10	P11	P12
Side/B2 MPO-8	P2	P1	P4	P3	—	—	—	—	P10	P9	P12	P11
Side/A3 MPO-8	P1	P2	P3	P4	—	—	—	—	P9	P10	P11	P12
Side/B3 MPO-8	P2	P1	P4	P3	—	—	—	—	P10	P9	P12	P11

光缆参数 Cable Parameters

连接器参数 Connector Parameters

光纤芯数 Fiber Core	24C	
光纤规格 Fiber Type	MM/OM4-50/125um	
工作温度 Operating Temperature	-40~70°C	
衰减 Attenuation	≤2.3dB/km@850nm	
外护套 Outer Jacket	外径 Dimension	3.0mm
	材料 Material	LSZH
	颜色 Color	枚红/Rose Red
拉力 Tension	短期 Short term	300N
	长期 Long term	150N

连接器型号/Connector Type	MPO/UPC/F/OM4/8C
标损 Standard Loss	≤0.75dB
低损 Elite Loss	≤0.35dB
回损 Return Loss	≥30dB
基准波段 Tesr Wavelength	@850nm
可重复性 Repeatability	≤0.2dB
互换性 Interchangeability	≤0.2dB
插拔次数 Durability	800~1000
工作温度 Operating Temperature	-40~75°C
