







1 2 3 4 5 6 7 8 9

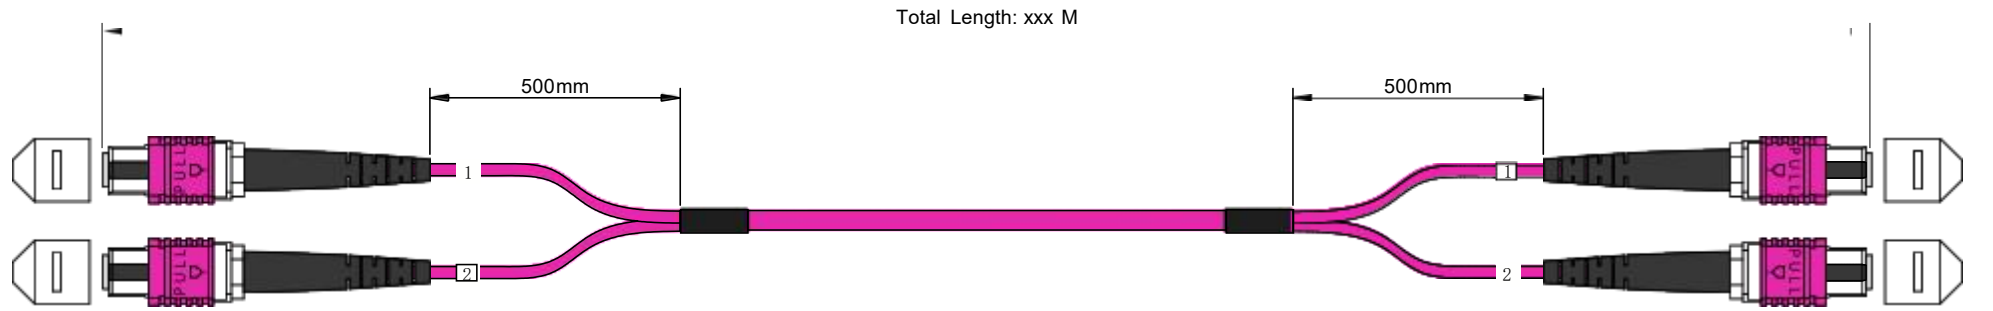

光缆示意图
Optical cable Diagram

A端/Side A

B端/Side B

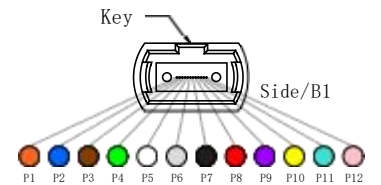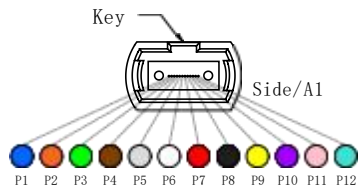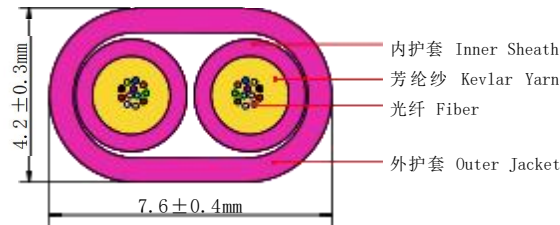

| 2*12CMPO-2*12CMPO Type:C Fiber Connectivity | | | | | | | | | | | | |
|---------------------------------------------|----|----|----|----|----|----|----|----|-----|-----|-----|-----|
| Side/A1 MPO | P1 | P2 | P3 | P4 | P5 | P6 | P7 | P8 | P9 | P10 | P11 | P12 |
| Side/B1 MPO | P2 | P1 | P4 | P3 | P6 | P5 | P8 | P7 | P10 | P9 | P12 | P11 |
| Side/A2 MPO | P1 | P2 | P3 | P4 | P5 | P6 | P7 | P8 | P9 | P10 | P11 | P12 |
| Side/B2 MPO | P2 | P1 | P4 | P3 | P6 | P5 | P8 | P7 | P10 | P9 | P12 | P11 |

×2

×2

光缆参数 Cable Parameters

| | | |
|----------------------------|-----------------|-------------------------|
| 光纤芯数 Fiber Core | 24C | |
| 光纤规格 Fiber Type | MM/OM4-50/125um | |
| 工作温度 Operating Temperature | -40~70℃ | |
| 衰减 Attenuation | ≤2.3dB/km@850nm | |
| 外护套 Outer Jacket | 外径 Dimension | 7.6 ± 0.4 * 4.2 ± 0.3mm |
| | 材料 Material | LSZH |
| | 颜色 Color | 枚红/Rose Red |
| 拉力 Tension | 短期 Short term | 300N |
| | 长期 Long term | 160N |

连接器参数 Connector Parameters

| | |
|----------------------------|-------------------|
| 连接器型号/Connector Type | MPO/UPC/F/OM4/12C |
| 标损 Standard Loss | ≤0.75dB |
| 低损 Elite Loss | ≤0.35dB |
| 基准波段 Tesr Wavelength | @850nm |
| 可重复性 Repeatability | ≤0.2dB |
| 互换性 Interchangeability | ≤0.2dB |
| 插拔次数 Durability | 800~1000 |
| 工作温度 Operating Temperature | -40~75℃ |

1 2 3 4 5 6 7 8 9