


图纸号 Draw ID:	01
变更记录 REV #	2022/11/23 初稿



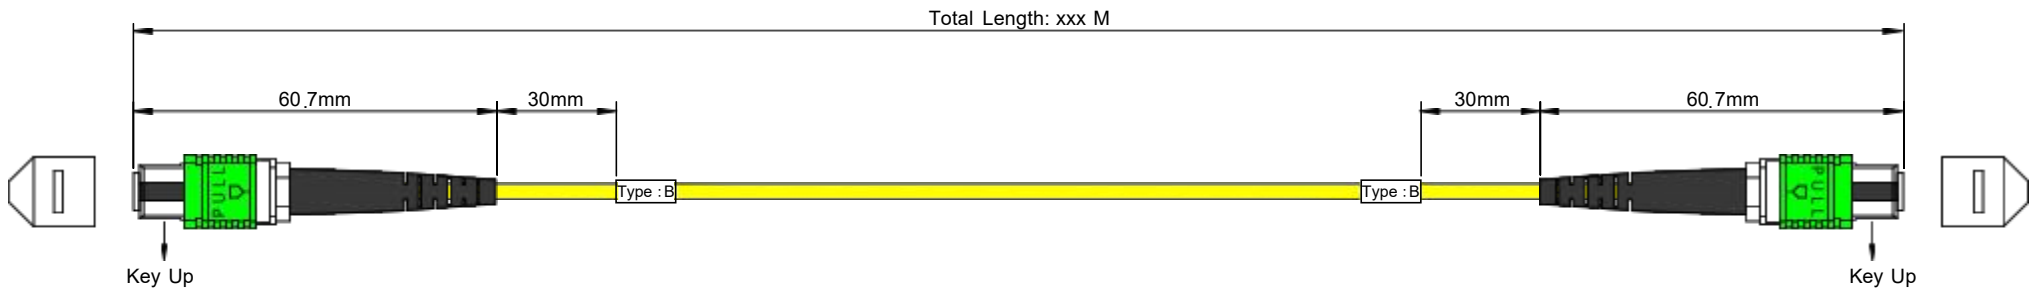


光缆示意图

Optical cable Diagram

A端/Side A

B端/Side B

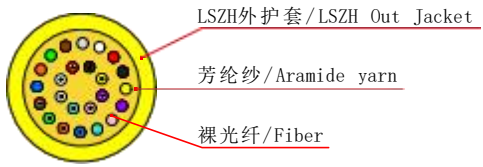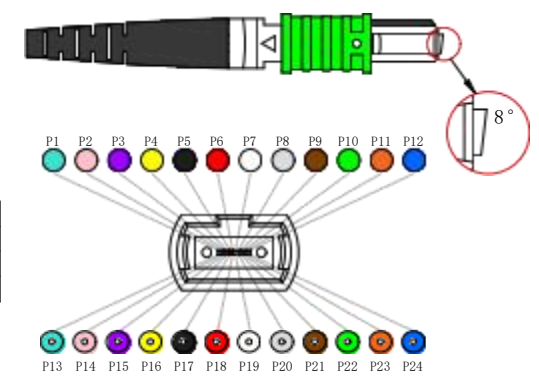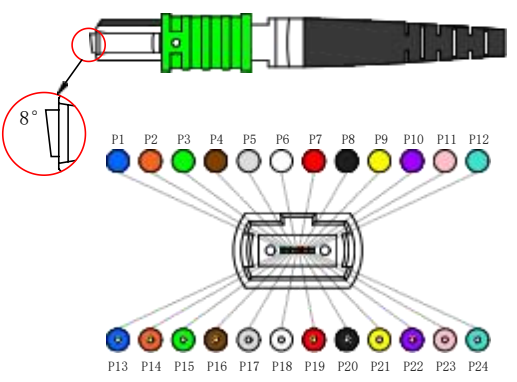

Side/A MPO	P1	P2	P3	P4	P5	P6	P7		P9	P10	P11	P12		P14	P15	P16	P17	P18	P19		P21	P22	P23	P24
Fiber Colour	BL	OR	GR	BR	GR	WH	RE		VE	PU	P1	P2		OR	GR	BR	GR	WH	RE		YE	PU	P1	AQ
Side/B MPO	P12	P11	P10	P9	P8	P7	P6		P4	P3	P2	P1		P23	P22	P21	P20	P19	P18		P16	P15	P14	P13

光纤芯数 Fiber Core	24C	
光纤规格 Fiber Type	SM/G657A2-9/125um	
工作温度 Operating Temperature	- 40~70℃	
衰减 Attenuation	≤0.35dB/km@1310nm	
	≤0.21dB/km@1550nm	
外护套 Outer Jacket	外径 Dimension	∅3.0mm
	材料 Material	LSZH
	颜色 Color	黄/Yellow
拉力 Tension	短期 Short term	300N
	长期 Long term	150N

连接器型号/Connector Type	MPO/APC/F/SM/24C
标损 Elite Loss	≤0.85dB
低损 Standard Loss	≤0.55dB
回损 Return Loss	≥60dB
基准波段 Test Wavelength	@1310/1550nm
可重复性 Repeatability	≤0.2dB
互换性 Interchangeability	≤0.2dB
插拔次数 Durability	800~1000
工作温度 Operating Temperature	- 40~75℃