






图纸号 Draw ID:	
变更记录 REV #	

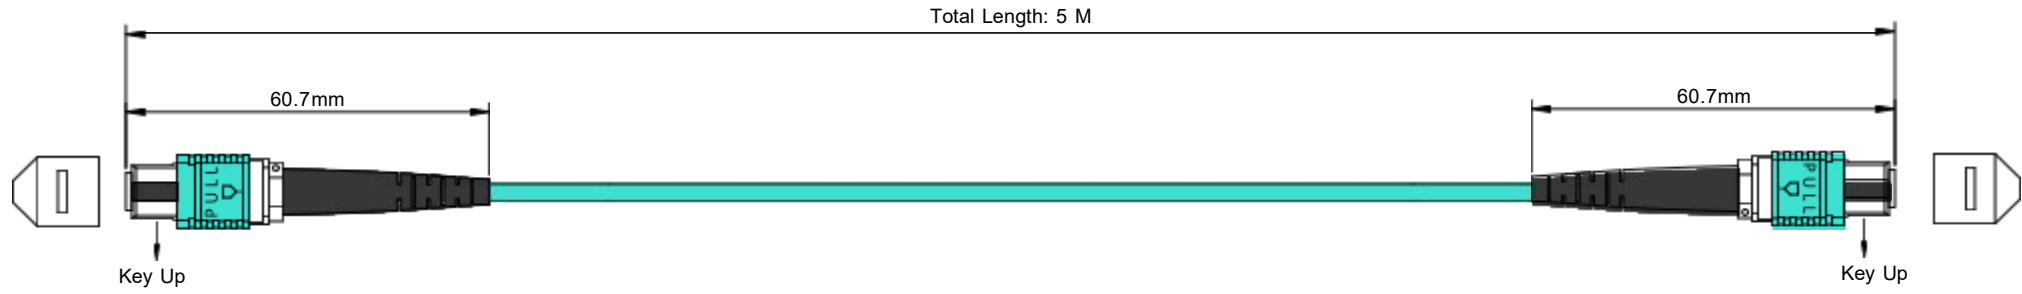


A端/Side A

光缆示意图/Optical cable Diagram

B端/Side B

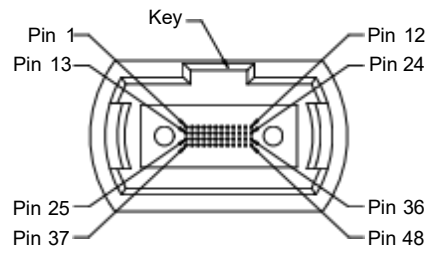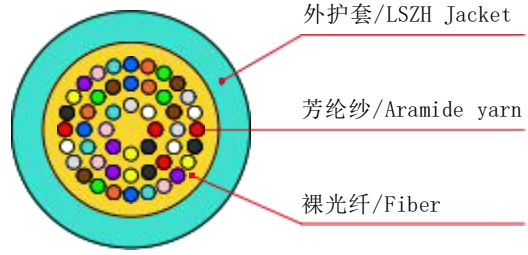

48C Fiber Connectivity	
Side/A MPO	P1 P2 P3 P4 P5 P6 P7 P9 P10 P11 P12 P13 P14 P15 P16 P17 P18 P19 P21 P22 P23 P24
Side/B MPO	P1 P2 P3 P4 P5 P6 P7 P9 P10 P11 P12 P13 P14 P15 P16 P17 P18 P19 P21 P22 P23 P24
Side/A MPO	P25 P26 P27 P28 P29 P30 P31 P33 P34 P35 P36 P37 P38 P39 P40 P41 P42 P43 P45 P46 P47 P48
Side/B MPO	P25 P26 P27 P28 P29 P30 P31 P33 P34 P35 P36 P37 P38 P39 P40 P41 P42 P43 P45 P46 P47 P48

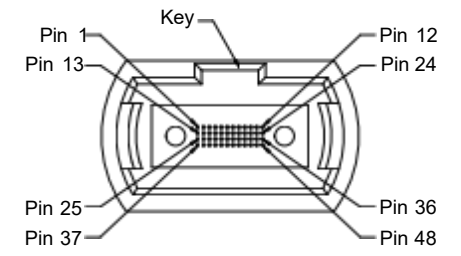

光缆参数 Cable Parameters		
光纤芯数 Fiber Core	48C	
光纤规格 Fiber Type	MM/OM3-50/125um	
工作温度 Operating Temperature	-40~70℃	
衰减 Attenuation	≤2.3dB/km@850nm	
外护套 Outer Jacket	外径 Dimension	∅4.8mm
	材料 Material	LSZH
	颜色 Color	青绿/Aqua
拉力 Tension	短期 Short term	300N
	长期 Long term	150N

连接器参数 Connector Parameters	
连接器型号/Connector Type	MPO/UPC/F/OM3/48C
插损 Insertion Loss	≤0.6dB
回损 Return Loss	≥30dB
基准波段 Test Wavelength	@850nm
可重复性 Repeatability	≤0.2dB
互换性 Interchangeability	≤0.2dB
插拔次数 Durability	800~1000
工作温度 Operating Temperature	-40~75℃